


# ATH-D

## Stationary and moveable double-sided glass loading machines

# LiSEC


CREATING VISIONS. PROVIDING SOLUTIONS.

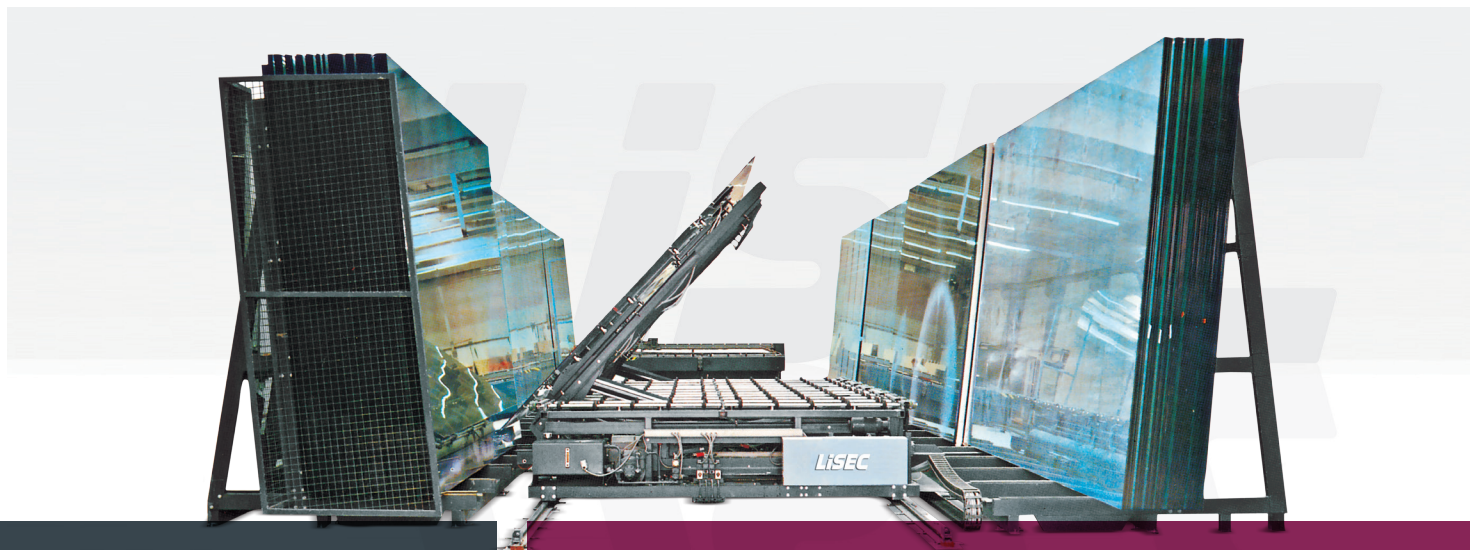

The double-sided glass loading machine lifts the glass sheets from the storage racks positioned on either side and automatically places the glass correctly for cutting. Both the swivel mechanism and vacuum frames are hydraulically operated. Optionally available in a moveable version, which allows loading to take place from more than two storage racks.

### Highlights

- Fully automatic loading of cutting lines
- Double-sided loading
- Handles large and split stock sizes
- Optional rapid version for split stock sizes

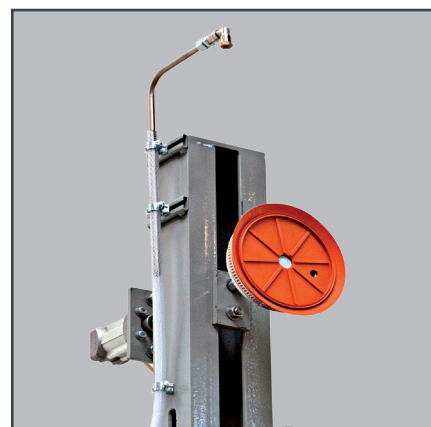

Suction plate for structured glass sheets optionally available for all ATH.

Technische Daten	ATH-37/26D	ATH-37/33D	ATH-60/33D	ATH-75/33D
Glass thickness	2,3 - 19 mm			
Minimal size	1,600 x 1,600 mm	1,600 x 1,600 mm	2,800 x 1,600 mm	2,800 x 1,600 mm
Maximal size	3,700 x 2,600 mm	3,700 x 3,300 mm	6,000 x 3,300 mm	7,500 x 3,300 mm
Track way (Glass rack-Sectios)	1 - 8	1 - 8	1 - 6	1 - 5