


PH-2

Manual Edge Press for Insulating Glass Units

LiSEC

CREATING VISIONS. PROVIDING SOLUTIONS.

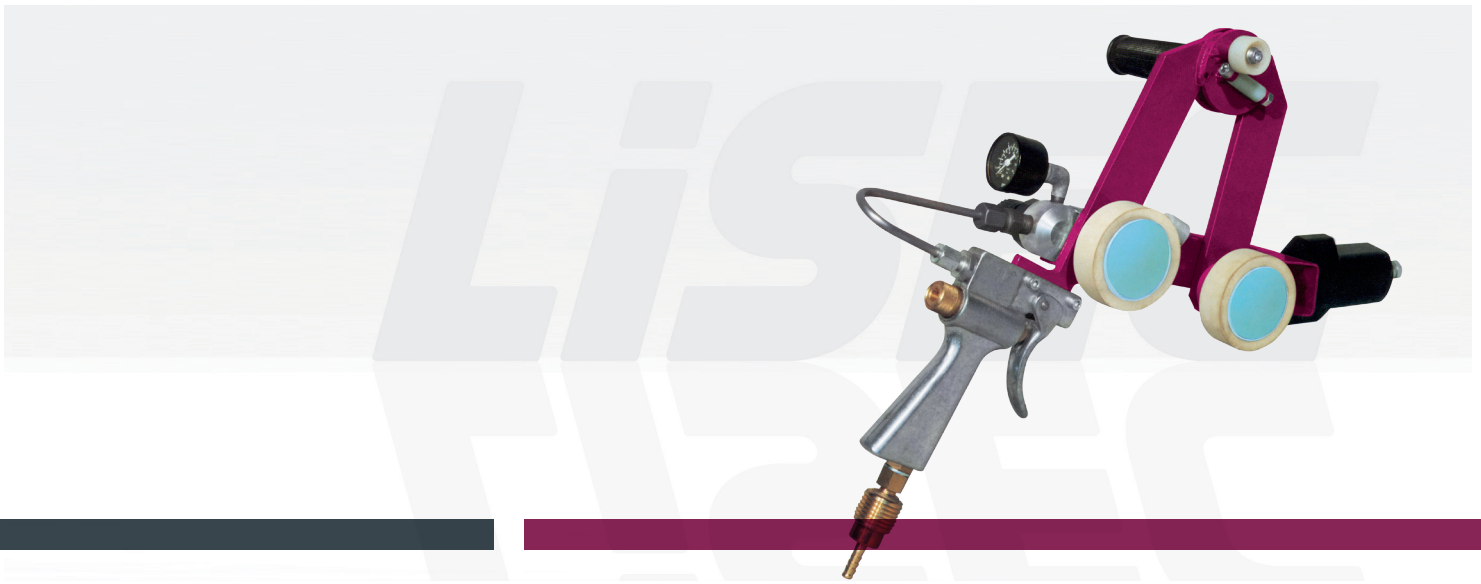

Manual edge roller press for the manual pressing of butyl coats in a horizontal position. The applied pressure is generated by a pneumatic cylinder and can be set via a manometer. Careful pressing by means of two rubber-coated press rollers; guide rollers ensure precise tracking during the pressing process.

Highlights

- Easy to use thanks to low overall weight
- Easy application with all shaped sheets, also suitable for circular frames

Technical Data	
Unit thickness max.	40 mm
Weight	5 kg
Operating pressure air	6 bar
Air consumption	3 l/min