

ER-140, ER-100

Sealing Table with Integrated Swivel Mechanism

LiSEC


CREATING VISIONS. PROVIDING SOLUTIONS.



The double suction plate ensures that the elements are optimally secured during the sealing process. The fact that the table is the same height as the transport tracks means that elements can be easily positioned and removed. The sealed sheets are automatically lowered to the level of the table. Four extendible telescopic arms for large-scale insulating glass elements.

Highlights

- Selectable rotation interruption at 90°, 180°, 360°
- Potentiometer control of rotating speed

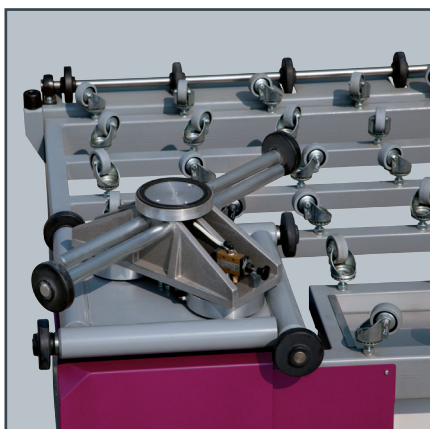

Single suction device (ER 100) as an additional equipment for small glass units

Technical Data	ER-140	ER-100
Minimal size	500 x 500 mm	230 x 180 mm
Maximal size	1600 x 1600 mm	1600 x 500 mm
Load max.	180 kg	30 kg
Weight	200 kg	11 kg
Transport height horizontal	865 mm	
Electric connection	0,12 kW	
Operating pressure air	6 bar	
Air consumption	100 l/min	