


A4AL

Desiccant Filling System for Profile Bars

LiSEC

CREATING VISIONS. PROVIDING SOLUTIONS.

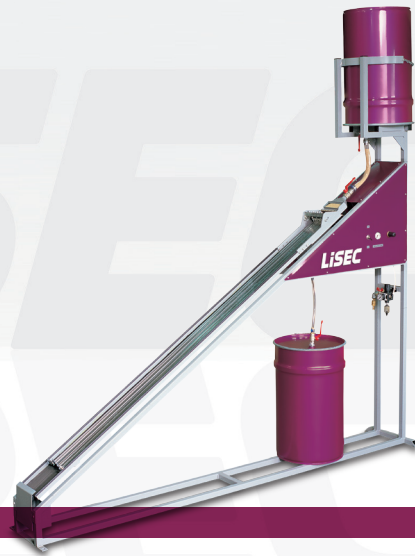

The special design of the multiple-filling head allows filled profiles to be removed and empty profiles to be inserted during the filling process while preventing desiccant spills. The spacer support at a 45-degree angle with spring clamping enables the simultaneous filling of several profile bars of varying widths.

Highlights

- Granulate material supplied via gravity vibrator system
- Indicator glass to monitor filling volume
- Closed filling system
- Also with suction conveyor system to process desiccant directly from 200-litre drum

Technical Data	
Applicable materials	Alu, Steel, Stainless, Synthetics
Profile width	6 - 24 mm
Profile height	6 - 8,5 mm
Profile length	50 - 2500 mm