


ATH

Stationary and mobile single-sided glass loading machines

LiSEC

CREATING VISIONS. PROVIDING SOLUTIONS.

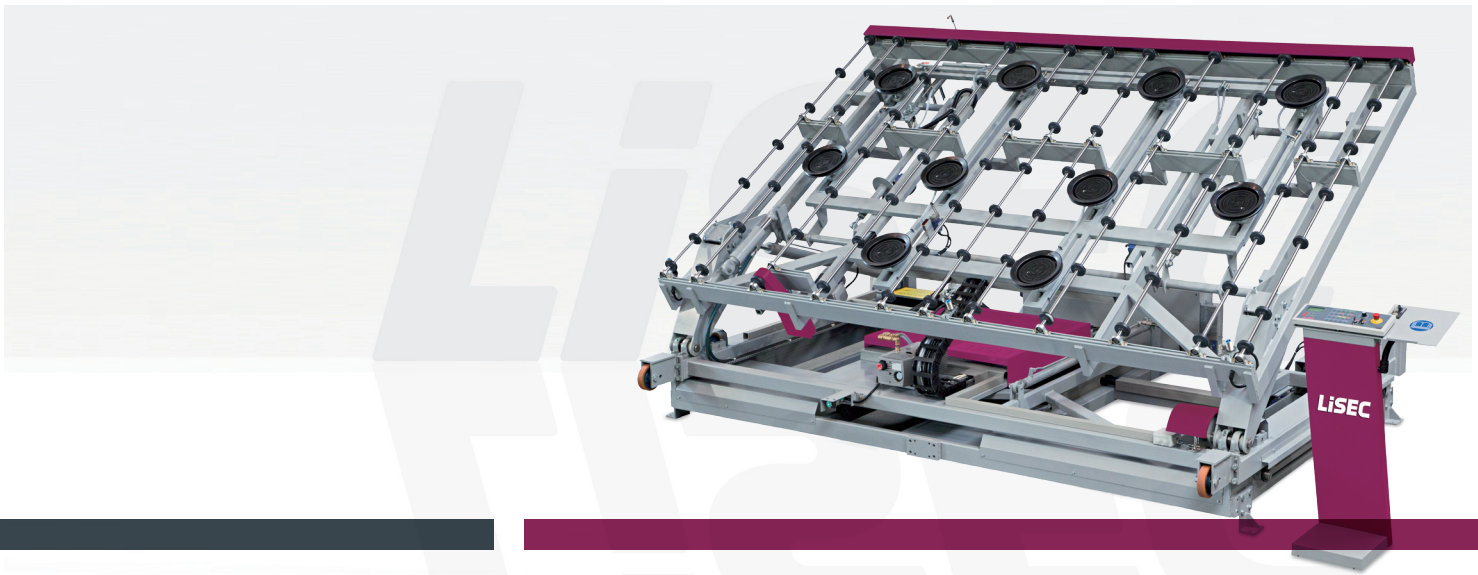

The glass sheets are lifted from storage racks positioned to one side and laid down for the fully automatic cutting process. Both the swivel mechanism and the frame with vacuum suction cups are oil-hydraulically operated. A linearly traveling version with an electronically controlled drive system is available, which can load glass from up to five rack sections.

Highlights

- Fully automatic loading of cutting lines
- Loading from one side
- Handling of large and split stock sizes

Optional

- Rapid version with dual hydraulic system



Separating device with nozzle and suction cup.



Suction plate with elastic suction lips provide a firm hold even when dealing with heavy glass sheets.

Technical Data	ATH-37/26	ATH-37/33	ATH-60/30	ATH-60/37
Glass thickness	2,3 - 19 mm			
Minimal size	1.600 x 1.600 mm	1.600 x 1.600 mm	2.800 x 1.600 mm	2.800 x 1.600 mm
Maximal size	3.700 x 2.600 mm	3.700 x 3.300 mm	6.000 x 3.300 mm	6.000 x 3.700 mm